

CONFIGURATION

Standard configuration with 5 trays of choice between push trays and spiral trays. Available also with 6 trays
Customized configuration on request

TRAYS

Flexible configuration between push trays and spiral trays

ILLUMINATION

LED

CHILLER

Compact chiller with quick extraction
R290 ecological refrigeration gas
Internal temperature 8°C with external temperature 32°C
3°C version
Optional silent chiller

INCLUDED AS STANDARD

Lift for products of ample dimensions with optical sensor on board
Optical sensor for detecting the fall of products and their permanence in the retrieval area, product retainer bar

DISPLAY

10.1" graphic display RES. 1024x600 with capacitive touch
Programmable in different languages with publicity capabilities

DISPLAY CASE


Excellent visibility of products

TECHNOLOGY

Telemetry
ETHERNET (RJ45) connectivity, WiFi
Router Modem 4G LTE applicable
EVA-DTS, GPE DATA
Release software updates by USB PenDRIVE or WiFi

SISTEMI DI PAYMENT SYSTEM

Executive-MDB
Predisposed for latest generation payment systems
(credit card, Paypal etc...)

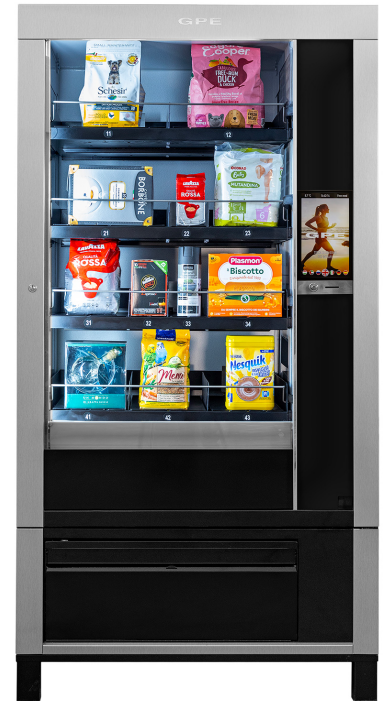

DIMENSIONS

HEIGHT	183 cm
WIDTH	94,5 cm
DEPTH	96 cm
WEIGHT	280 kg

ELECTRIC POWER SUPPLY ABSORBED POWER

230V +/- 10%
Also possible in 110V version

Standard Version
Average annual consumption: 1530 KWh
3° Version
Average annual consumption: 2540 KWh